



DAMIDOGLAS 155

Rectangular enamelled conductor of copper, covered with polyester-glassfibre yarn, class 155

Product name:

Damidoglas 155 1
Damidoglas 155 2

Properties:

- Excellent resistance to mechanical stress
- Very good adhesion to conductor

Specifications:

IEC 60317-60 or customer specification

Field of application:

- Generators
- Electric motors

UL approval:

Not approved

Standard packaging:

K500, VM630

Class: 155

Temperature index $\geq 155^{\circ}\text{C}$ acc. to experience
Heat shock: $\geq 175^{\circ}\text{C}$

Shelf life:


5 years, under normal ambient conditions

Insulation:

Basecoat: THEIC-modified polyester or polyesterimide
Overcoat: Polyamide-imide
1-2 layers of polyester glass fibre yarn

Conductor material

EN 1977 - ETP1 CW003A
EN 1977 - ETP CW004A
ASTM B49 - ETP C11000/C11040

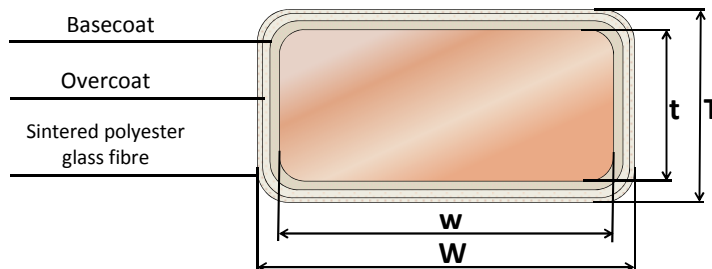

T - t = Increase in thickness

W - w = Increase in width

Conductor corner radius

Nominal thickness of conductor (mm)		Corner radius (mm)	Tolerance
Over	Up to and including		
-	1,00	0,5 nominal thickness	+/- 25%
1,00	1,60	0,50	+/- 25%
1,60	2,24	0,65	+/- 25%
2,24	3,55	0,80	+/- 25%
3,55	-	1,00	+/- 25%

Conductor tolerances

Nominal width or thickness of the conductor (mm)		Tolerance +/- (mm)
Over	Up to and including	
-	3,15	0,030
3,15	6,30	0,050
6,30	12,50	0,070
12,50	-	0,100

DAMIDOGLAS 155

Rectangular enamelled conductor of copper, covered with polyester-glassfibre yarn, class 155

Insulation increase


Designation	Nominal width of conductor	Increase in thickness	Increase in width
Damidoglas 155 1	$2,00 \leq w \leq 3,15$	$0,27 \pm 0,06$	max. 0,33
	$3,15 < w \leq 6,30$	$0,29 \pm 0,06$	max. 0,35
	$6,30 < w \leq 12,50$	$0,31 \pm 0,07$	max. 0,38
	$12,50 < w \leq 20,50$	$0,33 \pm 0,09$	max. 0,41
Damidoglas 155 2	$2,00 \leq w \leq 3,15$	$0,40 \pm 0,08$	max. 0,48
	$3,15 < w \leq 6,30$	$0,43 \pm 0,09$	max. 0,52
	$6,30 < w \leq 12,50$	$0,45 \pm 0,10$	max. 0,55
	$12,50 < w \leq 20,50$	$0,47 \pm 0,10$	max. 0,57

Properties for DAMIDOGLAS 155

Main characteristics	Test method	Interval	Acceptance criteria
Electrical properties			
Conductor resistance	IEC 60851 - 5.3	1)	$0,01724 \Omega \text{mm}^2/\text{m}$
Conductivity	1/R	1)	$> 58 \text{ m}/(\Omega \text{mm}^2)$
Breakdown voltage	IEC 60851 - 5.4	All sizes	2350 V
- Damidoglas 155 1 - Damidoglas 155 2			2560 V
Mechanical properties			
Elongation	IEC 60851-3.3	$1,00 \leq t \leq 2,50$	$\geq 30\%$
		$t > 2,50$	$\geq 32\%$
Springback angle	IEC 60851-3.4	All sizes	$\leq 5,5^\circ$
Flexibility	IEC 60851-3.5	$w \leq 8 \text{ mm}$	10 x width
- Bending edgewise		$w > 8 \text{ mm}$	15 x width
- Bending flatwise		All sizes	10 x thickness
Adherence	IEC 60851-3.5	All sizes	20 % stretch, no loss of adhesion
-Stretch			

1. Dependence of dimension is expressed by the unit

Dimension range

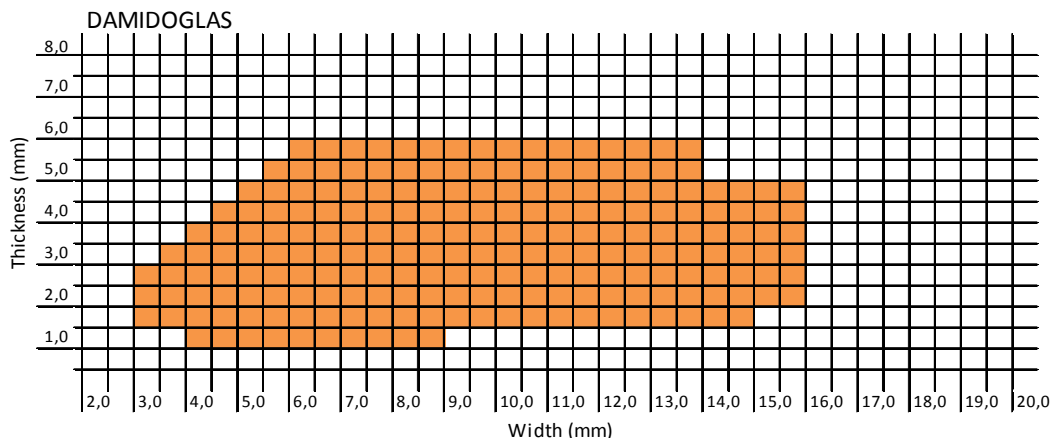

The technical data included is up to date at the time of printing.
LWW reserves the right to make any amendments deemed necessary

Ed.A(2)

LWW group

dahréntråd
Part of LWW Group

isodraht
Part of LWW Group

ślaska
Part of LWW Group

利里达尔线材
liljedahl wire
Part of LWW Group