



DAMIDFIBRE 155 AL

Rectangular enamelled conductor of aluminium, covered with glassfibre yarn, class 155

Product name:

Damidfibre 155 1 AL
 Damidfibre 155 2 AL

Properties:

- Excellent resistance to mechanical stress
- Heat resistant

Specifications:

Internal LWW or customer specification

Field of application:

- Generators
- Electric machines

UL approval:

Not approved

Standard packaging:

Drum 500 and 630

Class: 155

Temperature index $\geq 155^{\circ}\text{C}$ acc. to experience
 Heat shock: $\geq 175^{\circ}\text{C}$

Shelf life:


5 years, under normal ambient conditions

Insulation:

Basecoat: THEIC-modified polyester or polyesterimide
 Overcoat: Polyamide-imide
 1-2 layers of glass-fibre yarn
 Impregnation: Polyurethane

Conductor material:

EN 1715 - EN AW1370 [Al 99.7]

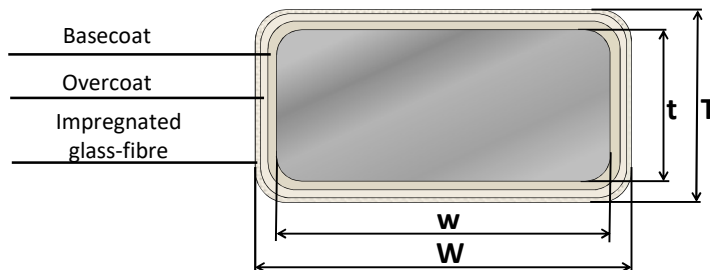

T - t = Increase in thickness

W - w = Increase in width

Conductor corner radius

Nominal thickness of conductor (mm)		Corner radius (mm)	Tolerance
Over	Up to and including		
-	1,00	0,5 nominal thickness	+/- 25%
1,00	1,60	0,50	+/- 25%
1,60	2,24	0,65	+/- 25%
2,24	3,55	0,80	+/- 25%
3,55	-	1,00	+/- 25%

Conductor tolerances

Nominal width or thickness of the conductor (mm)		Tolerance +/- (mm)
Over	Up to and including	
-	3,15	0,030
3,15	6,30	0,050
6,30	12,50	0,070
12,50	-	0,100

Certified according to ISO 9001, IATF 16949, ISO 14001

DAMIDFIBRE 155 AL

Rectangular enamelled conductor of aluminium, covered with glassfibre yarn, class 155

Insulation increase

Designation	Nominal width of conductor	Increase in thickness	Increase in width
Damidfibre 155 1 AL	$2,00 \leq w \leq 3,15$	$0,30 \pm 0,06$	max. 0,36
	$3,15 < w \leq 6,30$	$0,32 \pm 0,06$	max. 0,38
	$6,30 < w \leq 12,50$	$0,35 \pm 0,07$	max. 0,42
	$12,50 < w \leq 20,50$	$0,38 \pm 0,08$	max. 0,46
Damidfibre 155 2 AL ¹⁾	$2,00 \leq w \leq 3,15$	$0,37 \pm 0,06$	max. 0,51
	$3,15 < w \leq 6,30$	$0,37 \pm 0,06$	max. 0,53
	$6,30 < w \leq 12,50$	$0,42 \pm 0,08$	max. 0,57
	$12,50 < w \leq 20,50$	$0,47 \pm 0,08$	max. 0,63

1. Not IEC standard, values modified to suit LWW production process


Properties for DAMIDFIBRE 155 AL

Main characteristics	Test method	Interval	Acceptance criteria
Electrical properties			
Conductor resistance	IEC 60851 - 5.3	1)	$0,02789 \Omega \text{mm}^2/\text{m}$
Conductivity	1/R	1)	$> 35,5 \text{ m}/(\Omega \text{mm}^2)$
Breakdown voltage	IEC 60851 - 5.4	All sizes	1,5 kV
- Damidfibre 155 1 AL - Damidfibre 155 2 AL			2,0 kV
Mechanical properties			
Elongation	IEC 60851-3.3	$t \leq 3,15$	$\geq 15\%$
		$t > 3,15$	$\geq 20\%$
Flexibility	IEC 60851-3.5	All sizes	10 x thickness
- Bending flatwise			
Adherence	IEC 60851-3.5	All sizes	10 % stretch, no loss of adhesion
-Stretch			

1. Dependence of dimension is expressed by the unit

Dimension range

DAMIDFIBRE AL

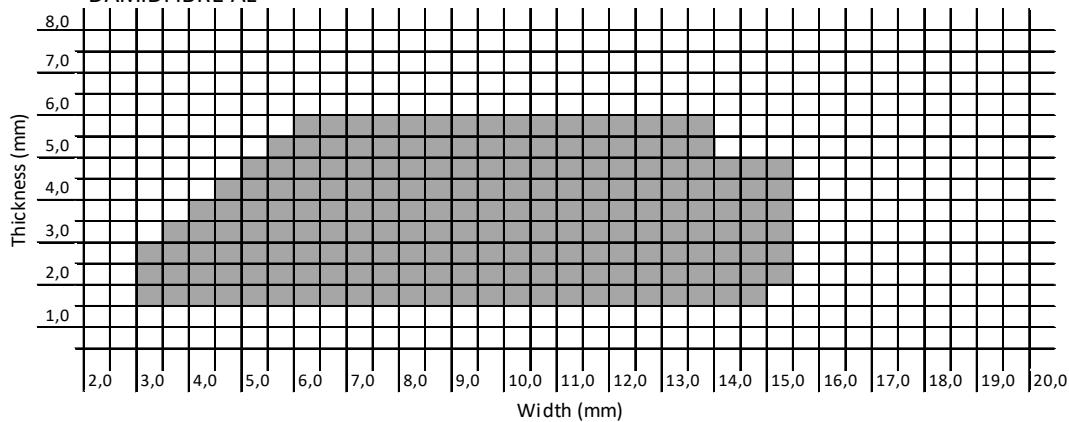

The technical data included is up to date at the time of printing.

LWW reserves the right to make any amendments deemed necessary. Ed.A(3)